




IBM ThinkPad T42 Modem Daughter Card Replacement

Written By: Gerald Watanabe

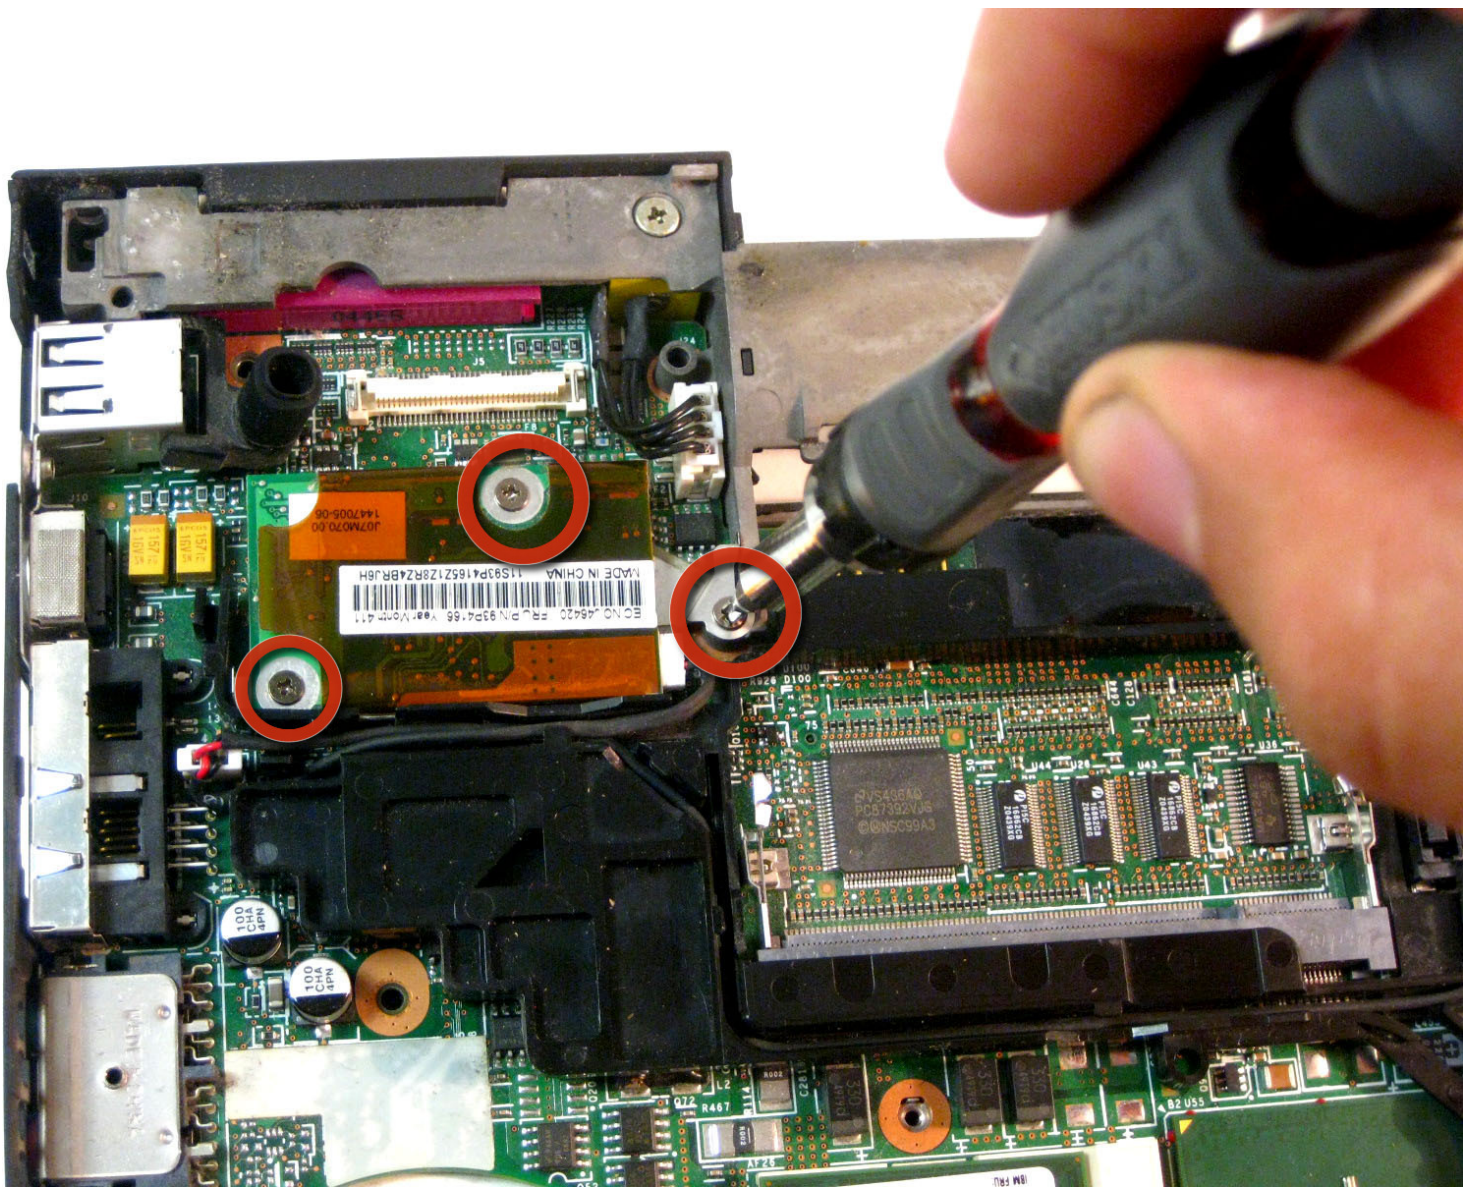

INTRODUCTION

Removal of the Modem Daughter Card.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Rear Cover



- Unscrew the following screws on the underside of the T42.
- Note: for ease of reassembly, keep track of which screws go where.

Step 2

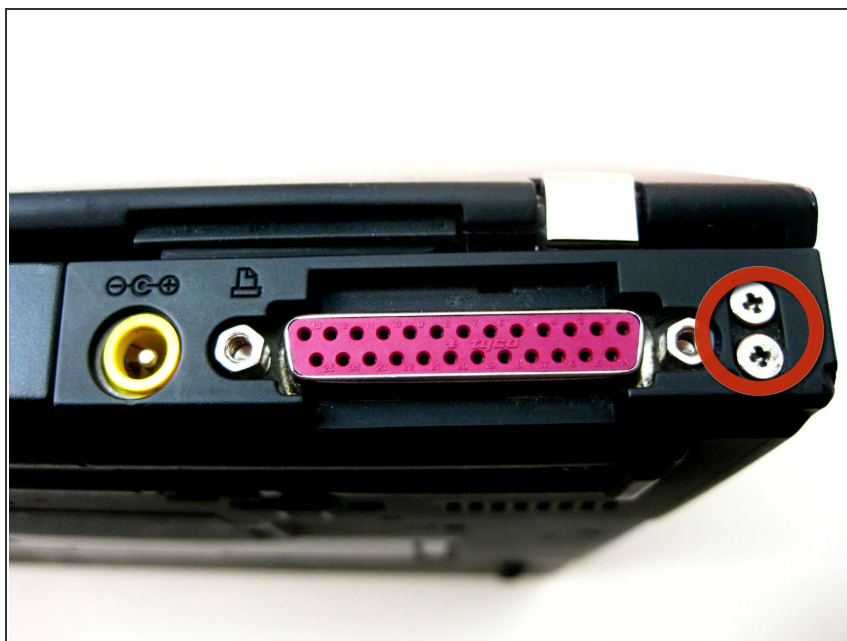



- Unscrew the 4 screws on either side of the rear end of the laptop.

Step 3 — Keyboard and Trackpad



- Flip the laptop over and open the display carefully - the keyboard, palm rest and bezel will be loose.

Step 4

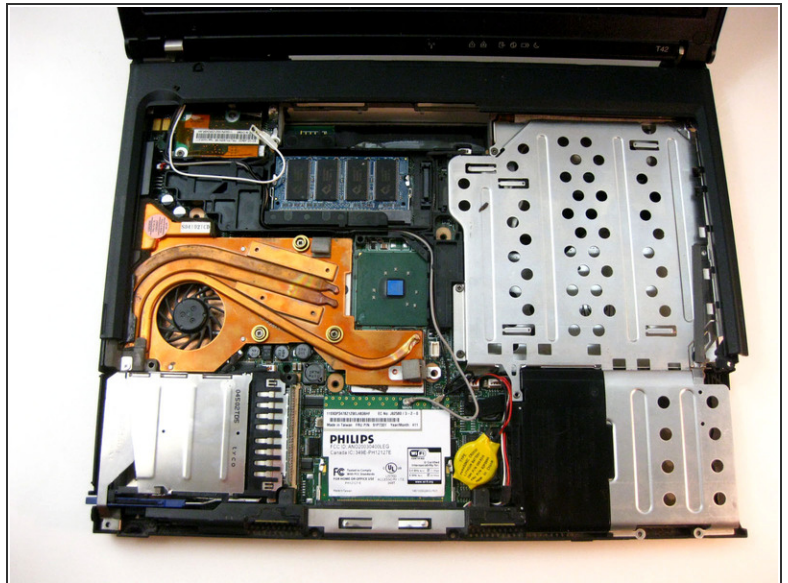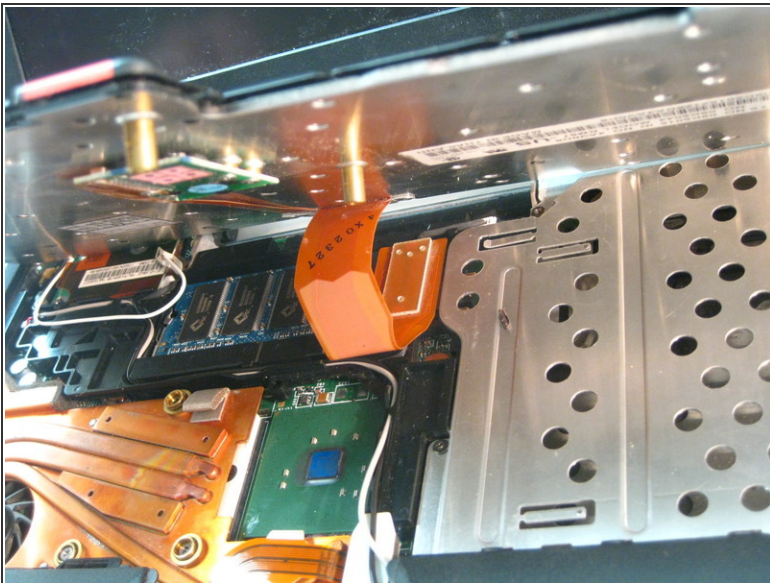


- Maneuver the palm rest away from the keyboard carefully, both the keyboard and palm rest/trackpad will come off together.
- ****WARNING**** Both the keyboard and trackpad have connectors to the motherboard. Disconnect these before completely removing either component.

Step 5 — Plastic Edge Cover




- Starting from the bottom right, carefully pry off the bezel. Use a small, flathead screwdriver if necessary.

Step 6 — Lower Bracket

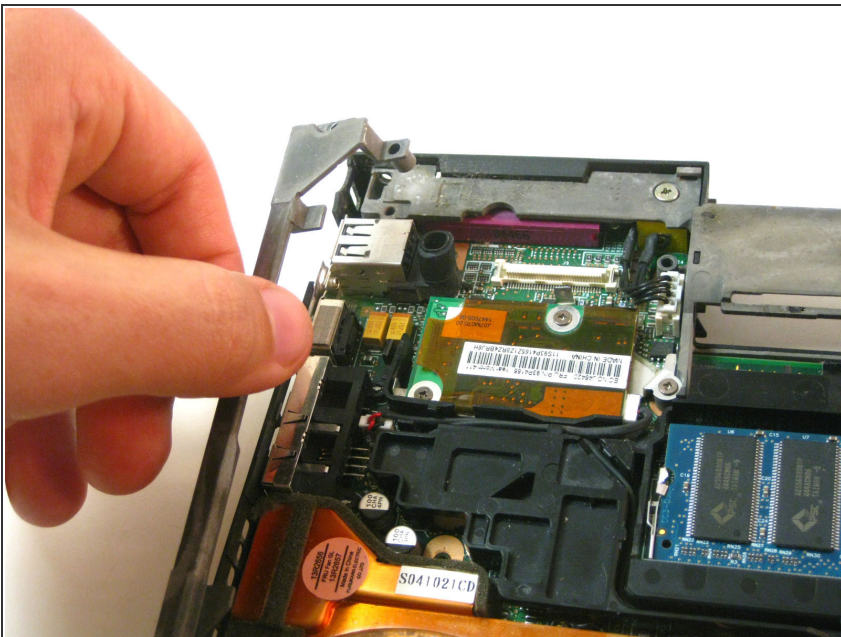


- The bracket will be free to move.

Step 7

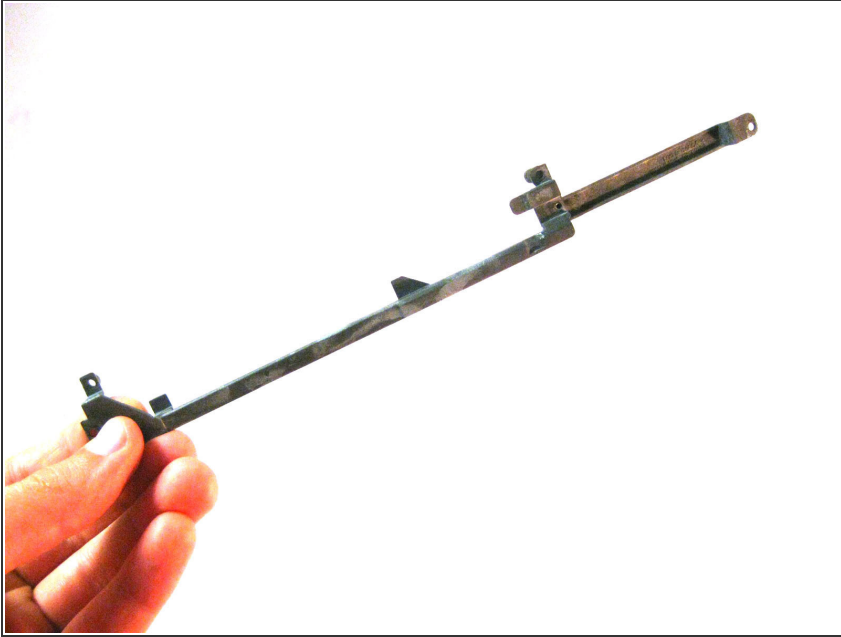


- Remove the bracket.

Step 8

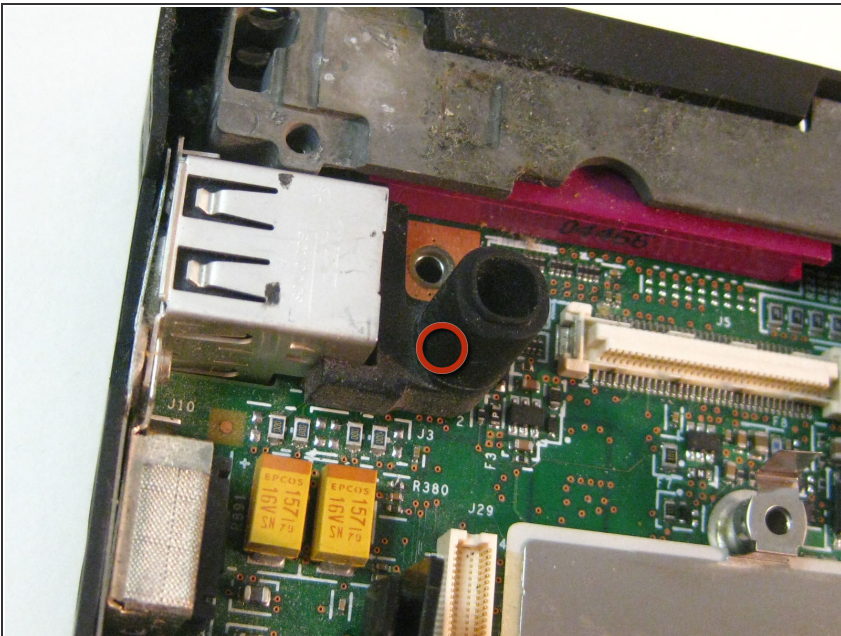


- Then remove the small rubber piece covering the microphone.

Step 9 — Modem Daughter Card

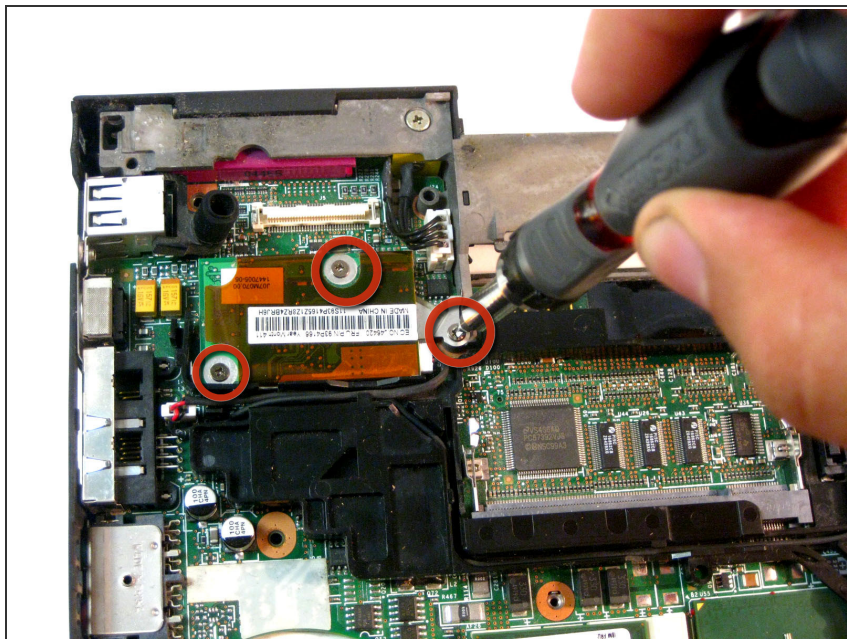


- Unscrew three phillips screws as shown.

Step 10

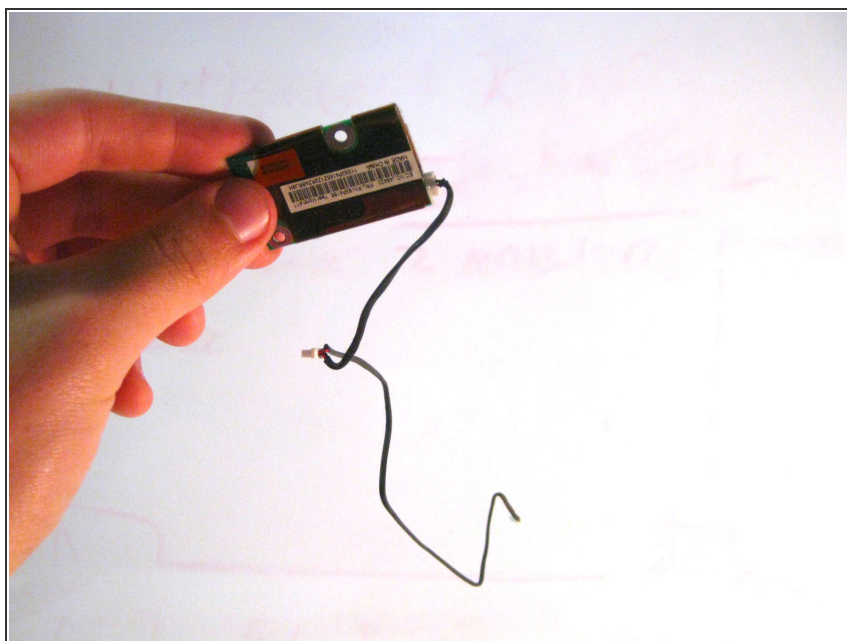

- The connector cables are wrapped around components for organization so follow these, unplug them and carefully pull them free.

Step 11

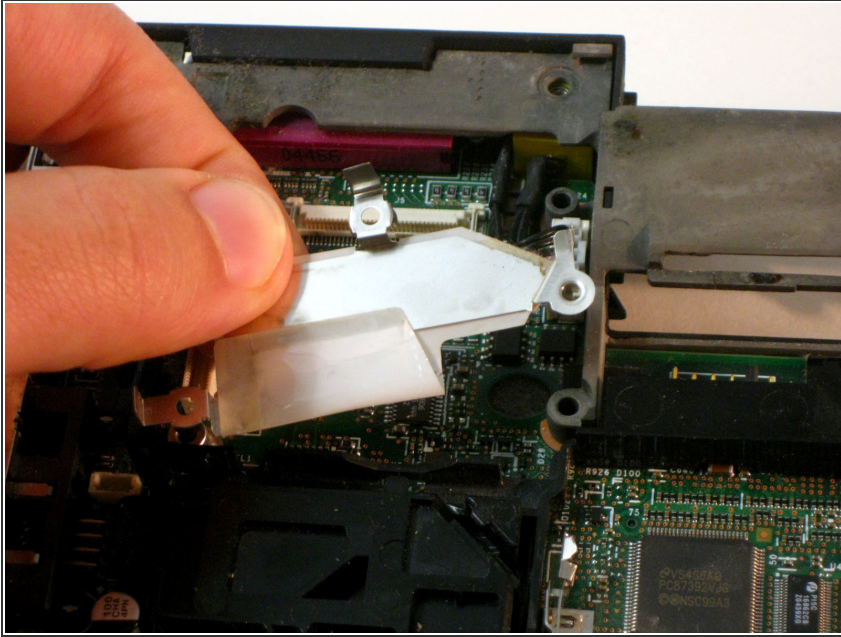

- Then remove the bracket that was sitting beneath it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-11 05:26:03 PM.